



TSU 600 & TSU 600e

Modular T1/FT1 Multiplexers with Embedded SNMP

Product Features


- T1/FT1 Multiplexer
- Economical Channel Bank Replacement
- Six option module slots support up to 4 DTE ports each
- Option modules available for data and voice applications such as analog voice, digital voice, DDS, Frame Relay, dial backup, high-speed data and ISDN
- Embedded SNMP management
- Front panel, backlit LCD for configuration and monitoring
- Extensive network testing and troubleshooting
- T-Watch PRO™ and Telnet support for local and remote units
- TSU 600e additionally supports redundant AC power, TFTP upgrades, and management via N-Form
- Available in AC and DC versions
- Industry-leading five-year North American warranty

The ADTRAN TSU 600™ and TSU 600e™ are modular, full-featured T1/FT1 Integrated Access Devices (IADs) designed to support a wide range of end-user applications. Through the six expansion slots on the rear of the TSU 600/600e, the user has complete flexibility in the type of DTE interfaces required for the T1 application. By supporting up to 24 DTE interfaces, the TSU 600(e) provides the same functionality as a traditional channel bank, while providing a small form factor and end-user oriented features. The TSU 600(e) provides complete monitoring and control of internal functions with embedded Simple Network Management Protocol (SNMP) provided through a SLIP interface. The TSU 600e has the added benefit of an integrated 10Base-T ethernet interface.

Support for future growth, through the unit's six expansion slots, is a key feature of the TSU 600(e). The ability to combine many types of plug-in and plug-on modules provides extensive combinations of voice and data interfaces. Several data modules are available for single and dual-port access

to Frame Relay, DDS or Basic Rate ISDN services provided over T1 facilities. Voice modules are also easily integrated, allowing access to analog voice circuits or PBX connections. As a fully functional T1 Multiplexer, the TSU 600(e) supports all mixed-mode networking applications providing termination for circuits containing voice, data and video applications.

Configuration and management of the TSU 600(e) is available through a variety of methods. The TSU 600(e) supports SNMP with gets, sets and traps functionality through a built-in agent. ADTRAN Enterprise MIBs support management for the TSU 600(e) and all installed expansion modules. For access to SNMP features, the TSU 600e has both a 10BaseT ethernet and a SLIP (EIA-232) connection, while the TSU 600 has a SLIP interface only. In addition to SNMP, the unit utilizes the management capabilities found in optional software products from ADTRAN including N-Form® (TSU 600e only) and T-Watch PRO.

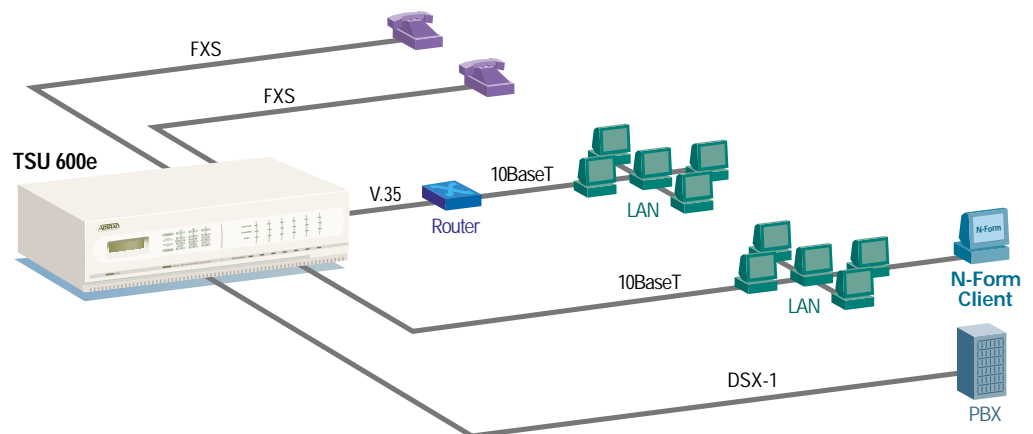



ADTRAN, Inc.

Attn: Enterprise Networks
901 Explorer Boulevard
Huntsville, AL 35806

P.O. Box 140000
Huntsville, AL 35814-4000

256 963-8000 voice
256 963-8699 fax
256 963-8200 fax back

General Information
800 9ADTRAN
info@adtran.com
www.adtran.com

**Pre-Sales
Technical Support**
800 615-1176 toll-free
application.engineer@adtran.com
www.adtran.com/support

Where to Buy
877 280-8416 toll-free
channel.sales@adtran.com
www.adtran.com/where2buy

**Post-Sales
Technical Support**
888 423-8726
support@adtran.com
www.adtran.com/support

**ACES Installation &
Maintenance Service**
888 874-ACES
aces@adtran.com
www.adtran.com/support

International Inquiries
256 963 8000 voice
256 963-6300 fax
international@adtran.com
www.adtran.com/international

**For the regional office
nearest you, visit:**
www.adtran.com/where2buy



ADTRAN is an
ISO 9001: 2000 certified supplier.



ADTRAN is a
TL 9000 3.0 certified supplier.

61202076L1-8D April 2003
Copyright © 2004 ADTRAN, Inc.
All rights reserved.

TSU 600 & TSU 600e

Modular T1/FT1 Multiplexers with Embedded SNMP

Product Specifications

TSU 600/600e Interface

Network Interface

- **Line Rate:** 1.544 Mbps +/- 75bps

Physical Interface

- **RJ-48C:** Modular, 8-pin

Framing

- D4(SF)/ESF
- AT&T 54016 or ANSI T1.403

Line Code

- AMI/B8ZS

Input Signal

- 0 to -36 dB

DS0 Assignment

- User selectable

T1 Transmit Timing

- Network, Secondary NI, Normal (CSU), Internal

Management Options

Front Panel LCD & Keypad

- **LCD:** 2x16 backlit display
- **Keypad:** Full numeric, 16-key
- **LEDs:** System, CSU, Test, Error and Alarm

Control In / Control Out Ports

- **Interface:** EIA-232, PC Serial Port or Modem or SLIP connection to router
- **Physical Connector:** RJ-45, modular 8-pin

SNMP/Telnet

- SLIP connection to router
- MIB II, RFC 1213 & 1407 compliant
- ADTRAN Enterprise MIB for Extended Monitoring, 600/600e Control/Configuration and expansion module support

10BaseT Interface (600e only)

- **Interface:** IEEE 802.3 compliant, 10 Mbps
- **Physical Connector:** RJ-45, modular 8-pin
- **Service:** SNMP, Telnet, ICMP, ARP, Ping, TFTP (600e only)

Testing Options

Local

- Payload, Line and DTE Loopback (option module)

Remote

- Payload, Line and DTE Loopback (option module)
- **Fractional T1 Loopback:** Per ANSI T1.403-1995, Annex B
- CSU Loopback (From telco)

Network Interface Test Jacks

- **Bantam Jacks:** TX, RX and RXMON Test Pattern Generator
- QRSS and 511 (selectable DS0s with detector)
- All 0s and All 1s (Transmit Only)

TR-08 SUPPORT

- Conforms with TR-TSY-000008
- TR-08 Mode I, Unconcentrated
- SLC96® framing with alarm reporting/monitoring
- ORB-13 or ORB-16 alarm messaging formats
- Single Party Ringing (SPR) and Universal Voice Grade (UVG) analog ports supported with FXS modules. CLASS® services also supported with these modules.

Performance Monitoring

- **Error Counts:** ES, SES UAS, % AS, % EFSEC, Alarms and Error Rates
- **Reports:** NI information stored for last 24 hrs (15-minute increments)
- **PRMS:** ANSI performance report messages

Agency Approvals

- UL 1950 and CUL
- FCC Part 15 (Class A) and Part 68

Environment

- **Operating:** 0° to 45° C (32 to 122° F)
- **Storage:** -20° to 70° C (-4 to 158° F)
- **Relative Humidity:** Up to 95%, non-condensing

Physical

- **Dimensions:** 5.5" H x 12.5" D x 17.5" W
- **Weight:** 13 lbs

Power

- **AC Power TSU 600:** 90-130 VAC, 60 Hz, 40 W Max
- **AC Power TSU 600e (single supply):** 90-120 VAC, 50/60 Hz, 40 W Max
- **DC Power 600 & 600e DC:** 21-26 VDC or 40-56 VDC, 40 W Max

Product Includes

- Two 8-pin to 8-pin modular cables
- One modular to female DB-25 adapter
- 19" rackmount brackets
- User Manual

Ordering Information

Equipment	Part #
TSU 600e	1202076L1
TSU 600e with redundant power	4202076L9
TSU 600e DC	1202076L1#DC
TSU 600	1202076L2
TSU 600 DC	1202076L2#DC

Specifications subject to change without notice. TSU 600, TSU 600e, and T-Watch PRO are trademarks of ADTRAN, Inc. ADTRAN and N-Form are registered trademarks of ADTRAN, Inc. All registered trademarks and trademarks mentioned in this publication are the property of their respective owners.